Thomas Helzel I Vincent Marriette I Marc Pavec

Coastal Radar "WERA", a tool for Harbour Management

The well known ocean radar "WERA" has been in continuous operation at the French coast near Brest since 2006. These systems are operated by ACTIMAR and the data are used by SHOM (Service Hydrographique et Océanographique de la Marine, France) who have evaluated the accuracy and reliability for professional applications. The range of these systems is about 120 km with a spatial resolution of 1.5 km and a temporal resolution of 3 measurements per hour. These two shore based stations cover an ocean area of about 10,000 km². The normal purpose of these systems is to provide actual maps of ocean surface currents and significant wave height for the Vessel Traffic Services and for Oceanographic research. This paper shows how the provided ocean current and wave data are used to improve predictions of drifting objects in case of an accident. Presently, search and rescue tools are based on hydro-dynamical and atmospheric models to provide hindcast and forecast situations. Even if these oceanic numerical models are efficient to produce instantaneous maps of currents, the accuracy of derived Lagrangian trajectories is not sufficient for search and rescue purposes. Results of the SAR-DRIFT project show the significant improvement of the drift simulation, when using real-time current data provided by radar systems instead of using results from numerical models. This improved quality of the drift prediction can be very useful for Search and Rescue applications. In addition, this drift prediction can be used for the forecast of drifting oil spill or containers in case of an accident to make the management of the pollution more effective. Furthermore this tool can be used in case of oil pollution for backtracking any detected pollution to identify the origin and time of this pollution. This can help to identify the polluter.

Introduction of the WERA System

The WERA system (WavE RAdar) is a shore based remote sensing system using the over the horizon radar technology to monitor ocean surface currents, waves and wind direction [Gurgel, 2000]. This long range, high resolution monitoring system operates with radio frequencies between 5 and 50 MHz. A vertical polarized electromagnetic wave is coupled to the conductive ocean surface and follows the curvature of the earth.

Figure 1: WERA Antenna array on a public beach in Miami

The rough ocean surface interacts with the radio wave and due to the Bragg effect back-scattered signals can be detected from ranges of more than 200 km. This effect was first described in 1955 by Crombie [Crombie, 1955] and the first radar system using that effect was developed by Barrick et al [Barrick, 1977] at NOAA in 1977.

The Bragg effect describes the coupling of the electromagnetic wave with the ocean wave field. To fulfil the Bragg conditions the electromagnetic wave length needs to have twice the wavelength as the ocean wave, e.g. for a 30 MHz radar signal with Lambda 10 m, the corresponding ocean wave is 5 m. Reflections from waves that fulfil this condition will generate a dominant signature in the received signal spectrum due to in-phase summation of amplitudes.

Quality of Ocean Current Maps

World wide more that 50 systems are installed and numerous validation studies were carried out. The ocean data that were used for the validation of the accuracy and reliability study are from an extreme dynamic ocean area off the French coast near Brest.

The data are provided for the "Vigicote" project with a pair of 16 channel medium range WERA systems owned by SHOM (Oceanographical and Hydrographical Service of the French Navy). The radar operates at a centre frequency of 12.38 MHz with a bandwidth of 100 kHz (range cell size of 1.5 km) at 30 Watts rf-power.

Over a period of more than 12 months a study was carried out to validate the quality of the provided data

Figure 2: Surface current map with averaging time of 12 min and 1.5 km range cell size
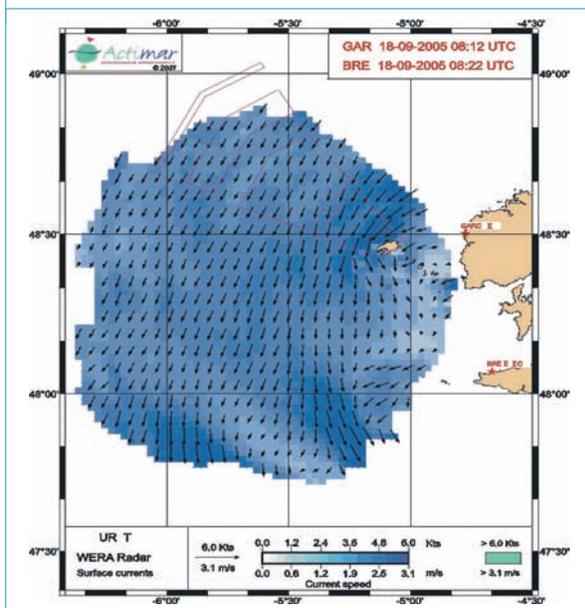

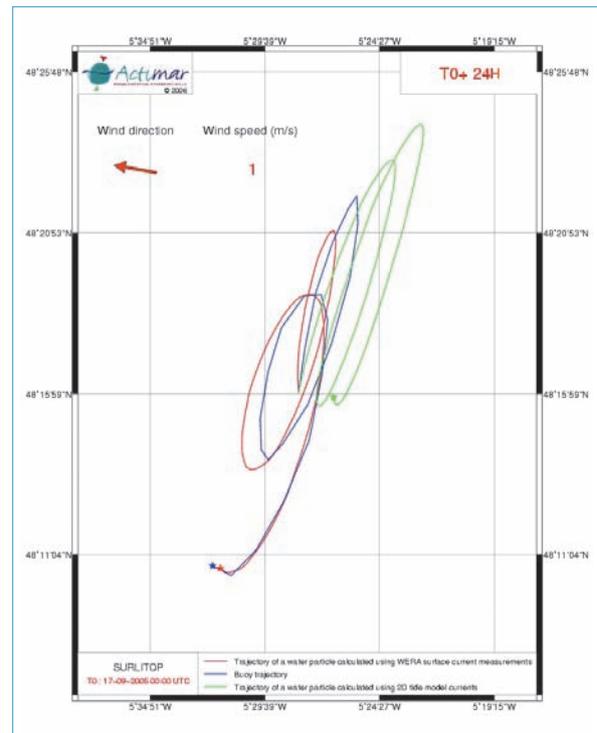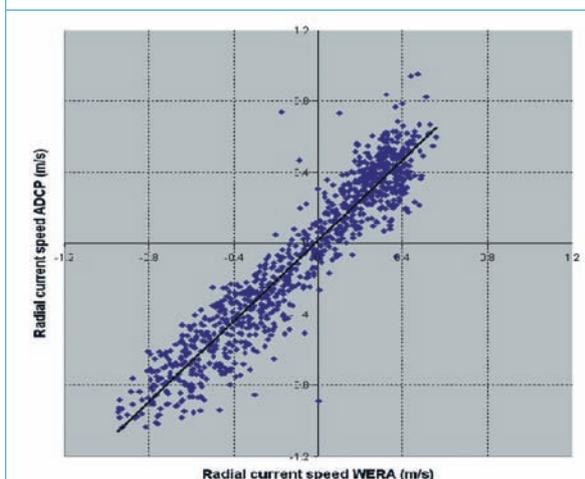**Figure 3. Comparison of radial current velocity measured with WERA and ADCP: r = 0.947**

Figure 4: Drifting "person", real 24 hour trajectory plotted in blue, prediction based on 2D tidal model in green and prediction based on measured data in red.

by means of a comparison with buoy data [Cochin, 2006]. Furthermore the reliability was qualified by comparing the users demands for data availability with the resulting data.

The accuracy and reliability was studied by SHOM using an ADCP and a Wave Rider buoy for ground truthing [Helzel, 2009]. Both instruments were located about 30 km off the coast. Fig. 2 shows a typical current map. The comparison between the measurement data of the ADCP and the WERA system is displayed in Fig. 3.

The corresponding correlation between the ADCP and WERA data, displayed in figure, shows a correlation factor of 0.947. This excellent agreement proves the accuracy of the WERA system to measure ocean surface currents.

Applications of Drift Predictions

To test this technique for SAR applications, surface drifters were launched and tracked. The drift prediction for this simulated "man-over-board" situation

were carried out by means of a 2D tidal model typically used for the SAR operations and by a drift prediction based on the ocean currents measured by the WERA systems.

The results clearly show that the drift prediction driven with the measured current data can keep close to the real drift trajectory much longer than the model driven prediction, see Fig. 4. This method would significantly increase the chance to find a lost person or drifting objects.

In combination with a stochastical estimation the drift of an oil accident can be predicted as well. A simulation of an accident near the French coast is displayed in Fig. 5.

The drift module can also be used to perform a backward computation. In case of a smaller oil pollution, e.g. caused by illegal tank flushing, an observed oil slick can be "backtracked". This may enable the coast guard to identify the polluter. Another example is given by the backtracking made on request of the French authorities after a ballot of cocaïne was found on a beach in France. In such cases, HF radars provide the best possible input to the computation, since only past data are required.

In-situ experiments for SAR operations

In connection with the SAR-Drift project [Røang, 2009], two in-situ experiments were carried out in Norway and France with drifting objects. With the help of the Navy in both cases, models of containers and a real container were left to drift in the area of coverage of HF-radars. The current-induced drifts of the objects were first predicted using forecast models, and then re-computed using currents from the radar measurements. All the results show a very good agreement between the observed trajectories and the radar-computed ones, while the predicted drifts rapidly diverge

Figure 5. Drifting oil pollution with estimated volumes that are already aground, on-shore or still drifting.
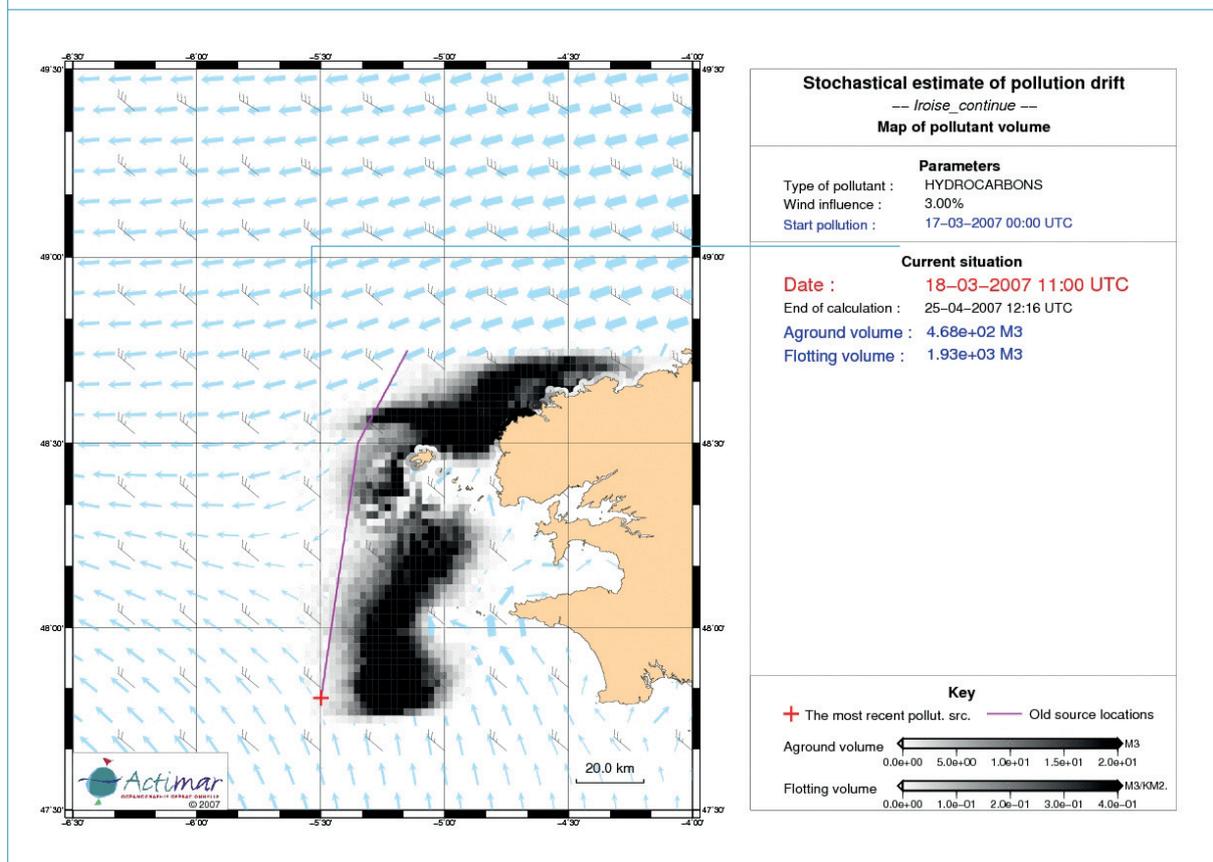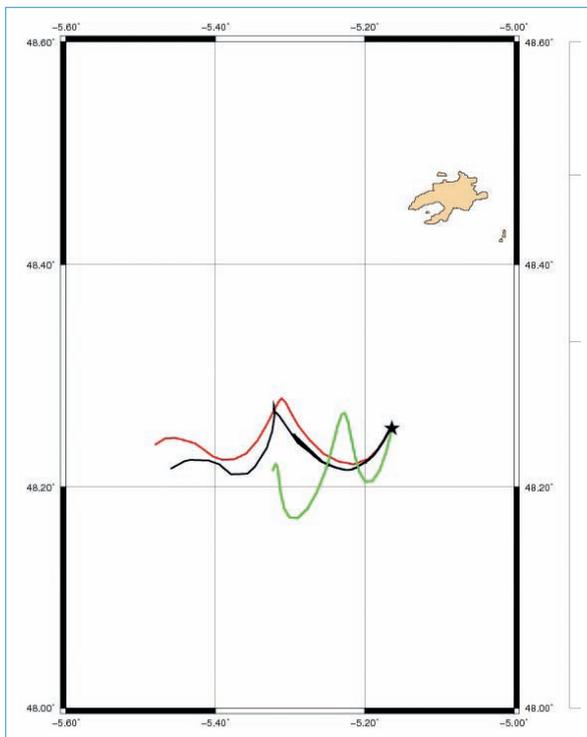
Figure 6 - Drift of a container in the Iroise Sea. The drift is computed using radar measurements and modelled currents. The black line indicates the real trajectory, green based on a model and red based on radar data.

from the real trajectories. Figure 6 shows the results for the real container in the Iroise sea. This emphasizes the importance of HF radars for search and rescue operations, especially in complex areas. After an accident, a much accurate estimation of the location of an object or body can be obtained using HF radar, compared to what can be done with forecast models.

Conclusions

The quality of the ocean radar data a valuable contribution to improve the quality of numerical models that are used for current drift predictions. Results from the experiments show the significant improvement of the drift simulation, if real-time current data are used that are provided by the radar systems. This can be a very valuable tool for Search and Rescue applications. In addition this drift prediction can be used for the forecast of drifting oil spill or containers in case of an accident to make the management of the pollution more effective. Furthermore this tool can be used in case of

the detection of smaller oil slick for backtracking this slick to identify the origin and time of this pollution. This can help to identify the polluter.

References

Barrick, "Ocean surface current mapped by radar", Science Vol. 198 (1977) pp 138-144

Cochin et al., SURLITOP experiment in West Brittany (France): Results and validation, ROW-6, Hamburg, Germany, May 2006

Crombie, "Doppler spectrum of sea echo at 13.56 Mc/s", Nature Vol. 175 (1955) pp 681-682

Gurgel, et al., "Wellen Radar(WERA), a new ground-wave based HF radar for ocean remote sensing", Coastal Engineering Vol. 37, NOS. 3-4, ISSN 0378-3839, pp 219 –234 (Aug. 1999)

Helzel et al., "Accuracy and Reliability of Ocean Current and Wave Monitoring with the Coastal Radar WERA", IEEE Oceans Conference Proceedings, (ISBN 978-1-4244-2523-5), Bremen, May 2009

Røang et al., SAR-drift final report, CMR report n°06-53001-RA-1,2009

The Authors

Thomas Helzel (IEEE M'06) received the diploma in electrical engineering with main emphasis on Communication Engineering from the University of Applied Sciences Lübeck, Germany in 1980. He worked at Philips Research Laboratory in Hamburg for more than nine years in the Department Microwave and Measurements (NMR Spectroscopy and Optical Measurement Projects). For four years he was head of the development at Landwehr Electronics GmbH. Together with Matthias Kniephoff, he founded the Helzel Messtechnik GmbH in 1995. The HF radar system development WERA was taken over by Helzel Messtechnik as technology transfer from the University of Hamburg in 1999.

Vincent Mariette received the diploma of Ph. D in physical oceanography from the "Université de Bretagne Occidentale" of Brest in 1983. During 8 years, he was research scientist in physical oceanography in CNRS (Centre National de la Recherche Scientifique), working on hydrodynamical modelling in coastal areas. He founded his consulting company to provide oceanographic expertise to French Navy, and shellfishes farmers. In 1999, he founded Actimar company to set up the concept of "operational oceanography". Since that date, he worked to elaborate operational systems (modelling or in situ measurements) to provide services in near real time to the clients.

Marc Pavec received the diploma of Ph. D in physical oceanography from the "Université de Bretagne Occidentale" of Brest in 2007. His thesis dealt with the problem of the stability of coastal currents. Since 2006, he works as a research engineer for Actimar, to develop operational tools for oceanography. He took part to the French-Norwegian project SAR-Drift, which aimed at improving drift computations to optimize search and rescue operations.